


10", 17 watts Round LED Surface Mount Down Light is a low-profile down light intended for ceiling mount applications.

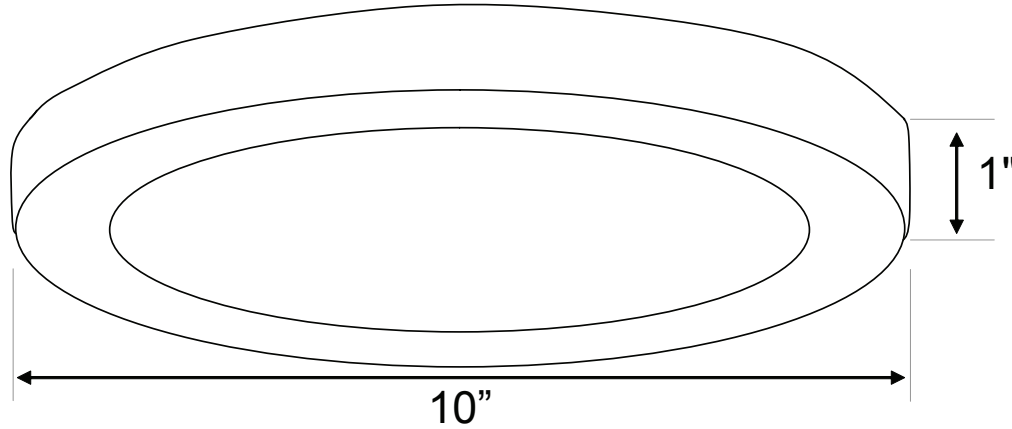

**Includes**

- (1) Surface mount fixture
- (1) Mounting plate
- (3) Wire Nuts
- (1) Fitting instruction
- (2) Wood screws

\*Specifications and dimensions subject to change without notice.

**Features**

- Driver on Board Technology, provides a 120V alternating current source and eliminates the need for traditional LED driver
- Quick & easy to install on standard junction box, ceiling mount with mounting plate
- Die-cast aluminum housing
- Smooth and continuous dimming, dimmable with most standard dimmers
- Rated for 50,000 hours
- No light bulbs to replace or dispose
- Instant full brightness (including in sub-zero temperatures)
- 80+ CRI
- cETLus listed for wet locations
- 5 year limited warranty are powder coat painted and available in the following finishes: White Gloss Enamel (WH), Bronze (BZ), Brushed Nickel (BN) and Black (BK)

**Specifications**

Electrical	Input: AC 100 – 120V 17W
Power Factor	0.95
LEDs	Epistar
LED Life	50,000 hours
Lumen Output WW = Warm White NW = Neutral White	1200 WW, 1250 NW
Lumen Efficacy (LPW) WW = Warm White NW = Neutral White	70 WW, 73 NW
Colour Temperature	Warm White 3000K Neutral White 4000K
CRI	≥80
Appearance Size (D x H)	10" x 1" (254mm x 25mm)
Approvals	cETLus listed for wet locations, Energy Star rated

**Ordering Code:**

LVLDL - SR - 10 -  -  - L

LED Colour      Trim Finish

WW = Warm White      WH = White  
(3000K)                  BK = Black  
NW = Neutral White    BZ = Bronze  
(4000K)                  BN = Brushed Nickel

Project		Type	
Date		Contact	
Notes			