


This advanced remote uses 2.4GHz RF for precise control up to 30m, supporting four zones and RGB+CCT lighting. It adjusts brightness, color, temperature, and flashing speed, offers 16 million colors, and includes a magnetic base for easy mounting.

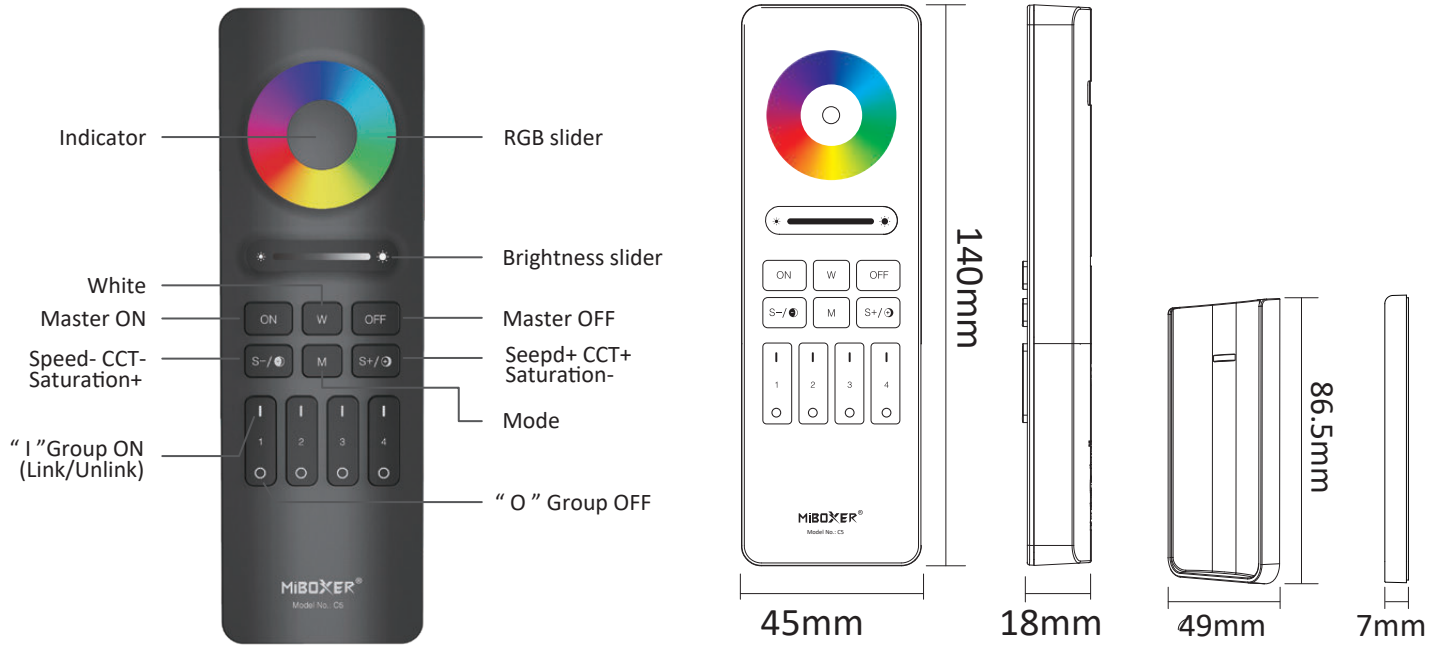

### Specifications

|                                 |  |
|---------------------------------|--|
| Outdoor/Indoor RGBW (RGB+3000K) | SL-OD-RGB30K-20-BA8                                    |
| Tunable CCT, High Power Outdoor | SL-OD-CCT-HP-20-B8                                     |
| Tunable CCT, Low Power Outdoor  | SL-OD-CCT-LP-XX-B8                                     |
| RGB High Power Indoor           | ST-ID-RGB-HP-20-B8                                     |
| RGB eStrip                      | LES-XX-RGB (XX: Length in feet)                        |
| Neon Flex                       | NFLX-XX-YY (XX: Length in feet; YY: Color temperature) |
| LED Hard Strip RGB              | LV-HS-RGB-24T2-X (X: Size)                             |

### Specifications

|                           |                 |
|---------------------------|-----------------|
| Working Voltage           | 3V (AAA * 2PCS) |
| Standby Power Consumption | 15 Microamperes |
| Transmitting Power        | 6dBm            |
| RF                        | 2.4GHz          |
| Control Distance          | 30m             |
| Modulation Method         | GFSK            |
| Operating Temperature     | -10 to 40°C     |
| Approvals                 | RoHS            |

### Ordering Code(s)

• CNTRL-4Z-RGBCCT-RM

|         |  |         |  |
|---------|--|---------|--|
| Project |  | Type    |  |
| Date    |  | Contact |  |
| Notes   |  |         |  |