

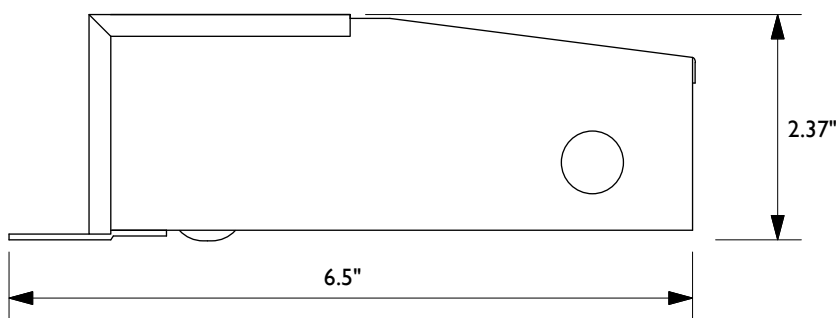
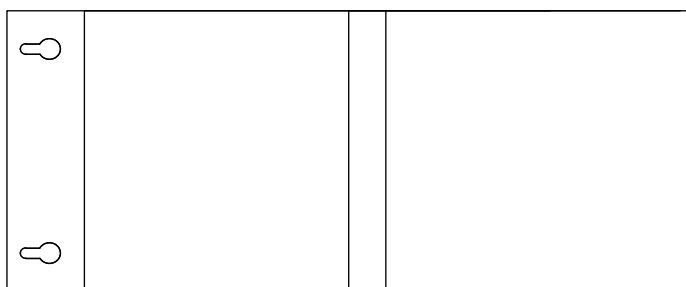
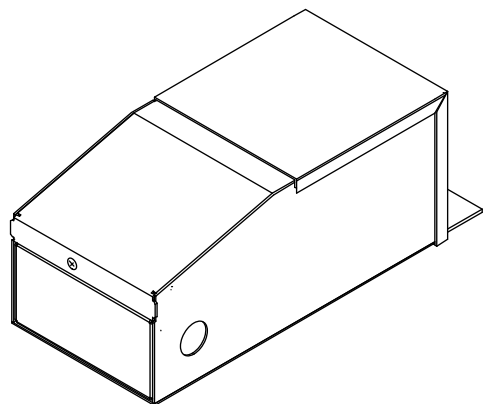




Specifications

1. Input is 120VAC / 60 HZ.
2. Output is 24VAC under Full-Load Conditions.
3. Enclosure temperature does not exceed 65°C in a 40°C Ambient, Fully Loaded.
4. The actual 96VA transformer is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide a symmetrical form of current under any condition.
6. Input leads are 18 AWG; output leads are 18 AWG. Lead insulation is 105°C.
7. The transformer has an Auto Reset 4A circuit breaker on the secondary side.
8. Wiring compartment has 2 knockouts sized for 3/4 inch screw cable connectors.
9. The wiring compartment cover has a removable cover secured with a screw.
10. The Transformer enclosure is rated NEMA 3R.
11. The Transformer is ETL / CSA / Class 2 Listed.
12. Weight: 3.2 lbs



Input Wires:
Black & White
Ground:
Green

Output Wires:
Purple & Purple



TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE
ANAHEIM, CA 92801
TEL: 714 772 7005 FAX: 714 772 7014
email: info@tokistar.com Website: tokistar.com

Part No. C2-96-24V
96VA Transformer Input: 120VAC / Output: 24VAC