

The adjustable LED gimbal fixtures are 80% more efficient than incandescent luminaires and they are available in multiple trim finish options to match any style of decor.



Features

- Energy efficient – up to 80% energy savings
- High Brightness COB LED's
- Low power consumption
- Warm White and Neutral White color temperatures
- Available in two beam angles
- New Construction, IC and remote installations
- cETLus listed for direct contact with insulation and combustible materials
- Easy to install, modular design
- 50,000 hour life
- 3 year limited warranty

Specifications

| | |
|-------------------|----------------------------------|
| Power Consumption | 9W |
| Input Voltage | 21V DC*, 320mA constant current |
| Beam Angle | 25/36° |
| Color Temperature | |
| Warm White | 3000 K |
| Neutral White | 4000 K |
| Lumens | |
| Warm White | 650 |
| Neutral White | 700 |
| Size | 1.7" x 3.8" (43 x 95.5mm) |
| Approvals | cETLus listed for damp locations |


Ordering Code:

GDL - 3 - 9W - - -


Beam Angle: 25 - 25 degrees, 36 - 36 degrees
 LED Color: WW - Warm White, NW - Neutral White
 Finish: WH - White Gloss Enamel, BL - Black, BZ - Bronze, SN - Satin Nickel

NOTE: WH finish is stock, all other options are special order, MOQ required.

| | | | |
|---------|--|---------|--|
| Project | | Type | |
| Date | | Contact | |
| Notes | | | |



Construction Plate

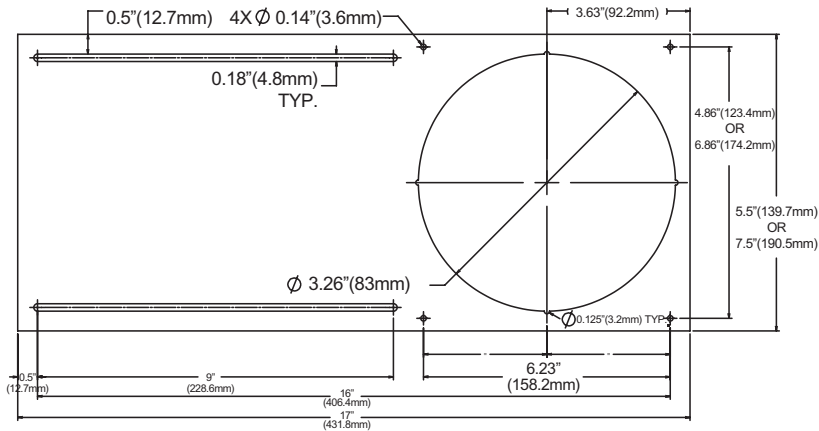

Compatible dimmers

Dimmable to 5% with most standard dimmers

| | |
|---------|---------------|
| Lutron | C.L™ Dimmers |
| | DVELV-300 |
| | SELV-3600P |
| | NTELV-300/600 |
| | MAELV-300/600 |
| Leviton | MRF2-6ND-120 |
| | VPE04 |
| | 6615 |
| | VPE06 |
| | VRE06 |
| | 6672 |
| | 6674 |
| IPE04 | |

