

High Power, RGBW Indoor



Offers dynamic range of colour and dedicated white for greater versatility suitable for all market segments.

FEATURES


- 50,000 hours life
- High brightness 5050 SMD LEDs
- Field cuttable
- Low power consumption
- Available in 20' (6.1m) and 100' (30.48m) spools (customcuts available)
- RGB colour change plus 3000K, 4000K and 6500K colour temperatures
- 20' spools come with 6 ft. pre-soldered power feeds
- Safe, 24V class 2 power supplies (sold separately)

APPLICATIONS

- Aisle and stairway lighting
- Cabinet and cove lighting
- Back lighting
- Showcase lighting
- Linear decorative lighting

SPECIFICATIONS

Product Code		LTP-XX-RGBYY-H90 (XX: Length in feet; YY: Colour temperature)
Electrical	Input Voltage	24V DC
	Power Consumption	4.3W/Ft
Specs	Colour Temperature	RGBW
	CRI	90+
	Beam Angle	120°
LED	Type	High Brightness 5050 SMD LEDs
	Life Span	50,000 Hours
	Spacing	16mm
	# per foot (304mm)	18
Design	Dimensions (Inches)	.47" W
	Dimensions (Millimeters)	12mm W
	Max Single Run Length	20Ft
	Custom Cuttable	4"
	Approved Location	Indoor
Warranty		6 years
Approvals		cETLus

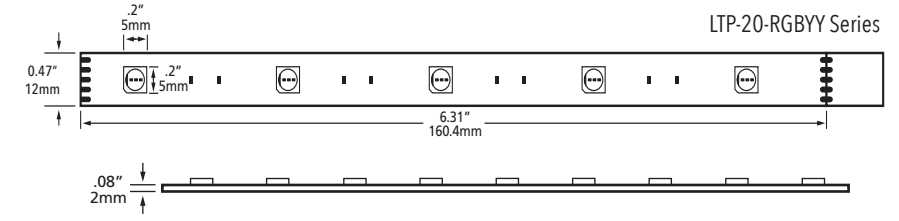

PRODUCT CODES

XX: Length in feet; YY: Colour temperature

20Ft spools
LTP - 20 - RGBYY - H90

100Ft spools
LTP - 100 - RGBYY - H90

Custom Cut
LTP - XX - RGBYY - H90

LED COLOUR
3000K
4000K
6500K

LED COLOUR
3000K
4000K
6500K

LED COLOUR
3000K
4000K
6500K

ACCESSORIES



LTP-001-RGBW-6
72" Power feed connector for RGBW indoor



LTP-002-RGBW
In-line connector for RGBW indoor




LTP-001-RGBW-6IN
6" In-line connector for RGBW indoor



LT-WIFI-RM
4-Zone RGB+CCT Remote



LT-WIFI-CTRL
3 IN 1 LED Strip Controller (WiFi+2.4G)



LTP-001-RGBW-12
144" Power feed connector for RGBW indoor



LT-WIFI-AMP
WiFi Signal Amplifier for RGB, RGBW, CCT



LT-490A
Signal Amplifier for RGBW

NOTE: See page 36-37 for the complete range of aluminum extrusions.

NON-DIMMABLE DRIVERS

MLDR-120-24
Indoor/Outdoor driver
Max. recommended load 90W or 20' (6.1m) per single tap, 120W or 27' (8.23m) combined two secondary taps.
120W hardwire
Input: 100 - 240V AC
Output: 24V DC
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

MLDR-20-24JB
Indoor driver
Max recommended load 18W or 4' LED Strip
20W hardwire
Input: 100 - 240V AC
Output: 24V DC
4 1/8" x 4 1/8" x 1 1/2" (104.8 x 104.8 x 38.1mm)

