


Tokistar's LC-ICH-MULTI Dimmer Pack can be used with any of Tokistar's LED Lighting Systems operating from our 6, 8, 12 or 24 VDC LED Drivers. The maximum rating at 6, 8 and 12 VDC is 5 amps. The maximum rating at 24 VDC is 4 amps.

This unit may be operated on different dimming protocols, which include:

DMX Mode - In this mode, each unit is independently addressable. Convenient In-Out terminals are provided for connecting units in series.

ANALOG Modes - You may select between 0-10V or 1-10V Analog protocols. Convenient In-Out terminals are provided for connecting units in series.

MANUAL Mode - You may select a light intensity the fixtures will operate at. In this case, no external dimming device is required.

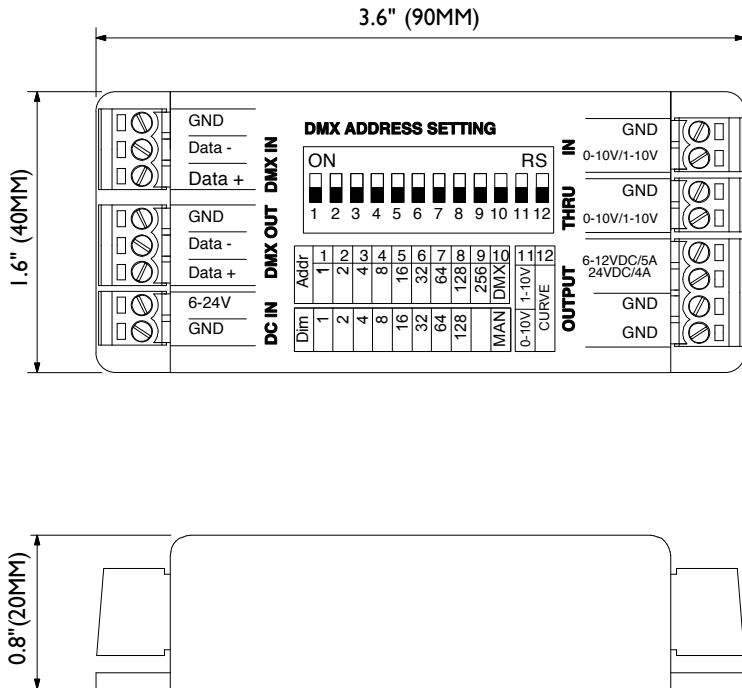

| TECHNICAL SPECIFICATIONS | |
|--------------------------|--|
| Power Requirement | 6~12VDC / 5A Max., 24VDC / 4A Max. |
| Input | 2-PIN Black terminal connector for Power In 2-PIN Green terminal connector for Analog In 3-PIN Green terminal connector for DMX In |
| Output | 2-PIN Orange terminal connector for Analog Out 3-PIN Orange terminal connector for DMX Out 4-PIN Green terminal connector for LOAD (5A Max.) |
| Housing | Black Plastic |
| Environmental Rating | IP20 / Dry Location Only |
| Control Protocol | DMX-512 (1990), Analog (0-10 or 1-10VDC) |
| Connection | Terminal |
| Listing | CE Certified / ETL Listed |
| Operation Temperature | 0 DEG. C to + 50 DEG. C |
| Dimensions | 3.6" (90mm) L x 1.6" (40mm) W x 0.8" (20mm) H |
| Weight | 50g / 0.11 LBS. |



TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE
ANAHEIM, CA 92801
TEL: 714 772 7005 FAX: 714 772 7014
email: info@tokistar.com Website: tokistar.com

LC-ICH-MULTI SUBMITTAL

CATALOG#: LC-ICH-MULTI

DATE: SEPTEMBER 10, 2013

DRAWN BY: R. CORDOVA

SCALE: NTS

WEIGHT: 50g / 0.11 lbs