
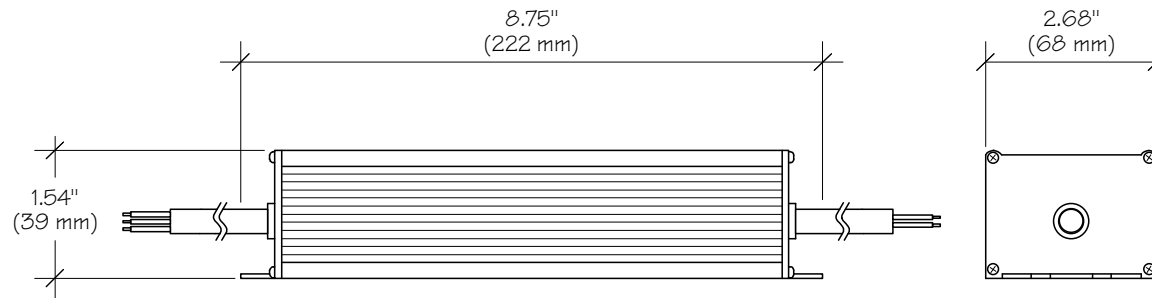


AC INPUT  
BROWN WIRE: AC LINE  
BLUE WIRE: AC NEUTRAL  
YELLOW/GREEN WIRE: GROUND

DC OUTPUT  
BLACK WIRE: -V  
RED WIRE: +V

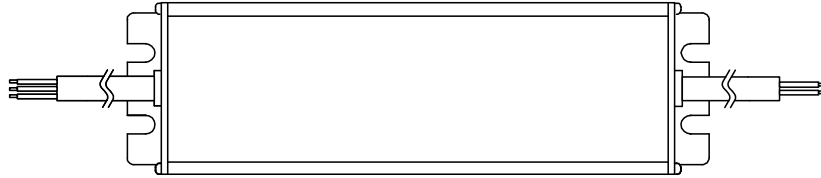

## SPECIFICATIONS

1. INPUT RANGE: 100~277VAC
2. FREQUENCY RANGE: 50~60Hz
3. OUTPUT: 24VDC (+/- 3%)
4. MAX. OUTPUT CURRENT: 4.0A
5. MAX. OUTPUT POWER: 96W
6. PROTECTION: OVERLOAD, OVER VOLTAGE, SHORT CIRCUIT, OVER TEMPERATURE
7. WORKING TEMPERATURE: -30C~+50C
8. DIMENSIONS: 2.68" x 8.75" x 1.54"
9. ENCLOSURE RATING: SUITABLE FOR USE IN DRY, DAMP AND WET LOCATIONS / IP67 RATED
10. MOUNTING: FLANGE MOUNT
11. STANDARDS: ETL LISTED TO UL 2108 WHEN USED WITH TOKISTAR LIGHTING PRODUCTS  
UL 879, UL 8750, UL 1310 Class 2  
TUV EN60950-1, EN61347-1  
EN61347-2-3 ind.  
CAN/CSA C22.2 No. 223-M91
12. WEIGHT: 2.20 Lbs / 1 Kg



### TOKISTAR LIGHTING INC.

1015 EAST DISCOVERY LANE  
ANAHEIM, CA 92801  
TEL: 714 772 7005 FAX: 714 772 7014  
email: info@tokistar.com Website: tokistar.com

LDR24-96: 96VA LED DRIVER  
INPUT: 100~277VAC / OUTPUT: 24VDC