


LED Type High Brightness 5050 SMD LEDs  
 # of LEDs per foot 9  
 Viewing Angle 120°  
 LED Life 50,000 hours  
 Colour RGB  
 Custom Cuttable 6.5"  
 Operating Voltage 24V DC  
 Maximum Single Run 40FT  
 Power Consumption 2.2W / ft  
 LED Spacing 32mm  
 Approvals cETLus  
 Adhesive 3M double side adhesive tape

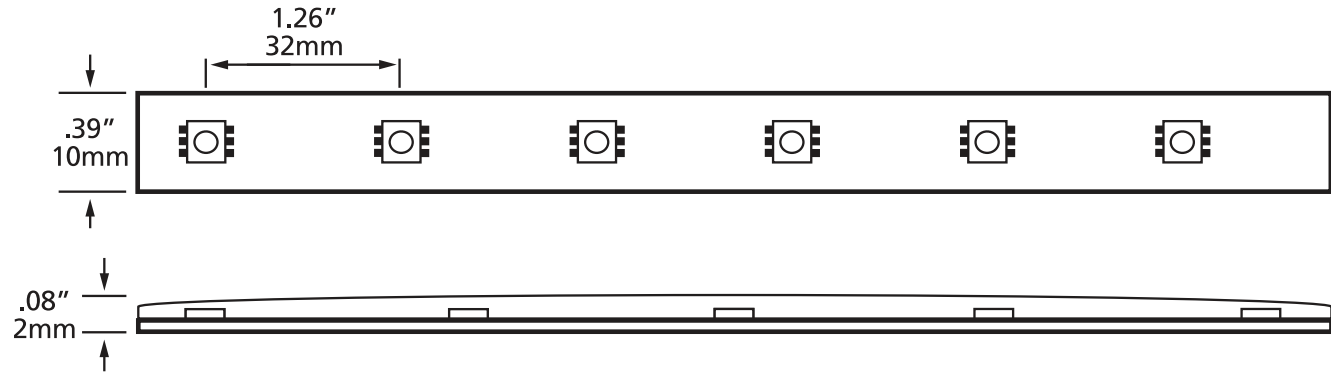

Revisions:

4		
3		
2		
1		

\* Use only MLDR-120-24 or MLDR-20-24JB power supplies when controlling RGB LED Strip.  
Do not use dimmable power supplies for colour change applications.

	Project:	Part number: LP-5060-30-24OD-RGB	Scale: NTS
	Product: LOW POWER TAPE LIGHT 2.2W/FT OUTDOOR USE RGB	Type:	Date: