


LS-0.2 Watt KINETIC TOKILEDDS®

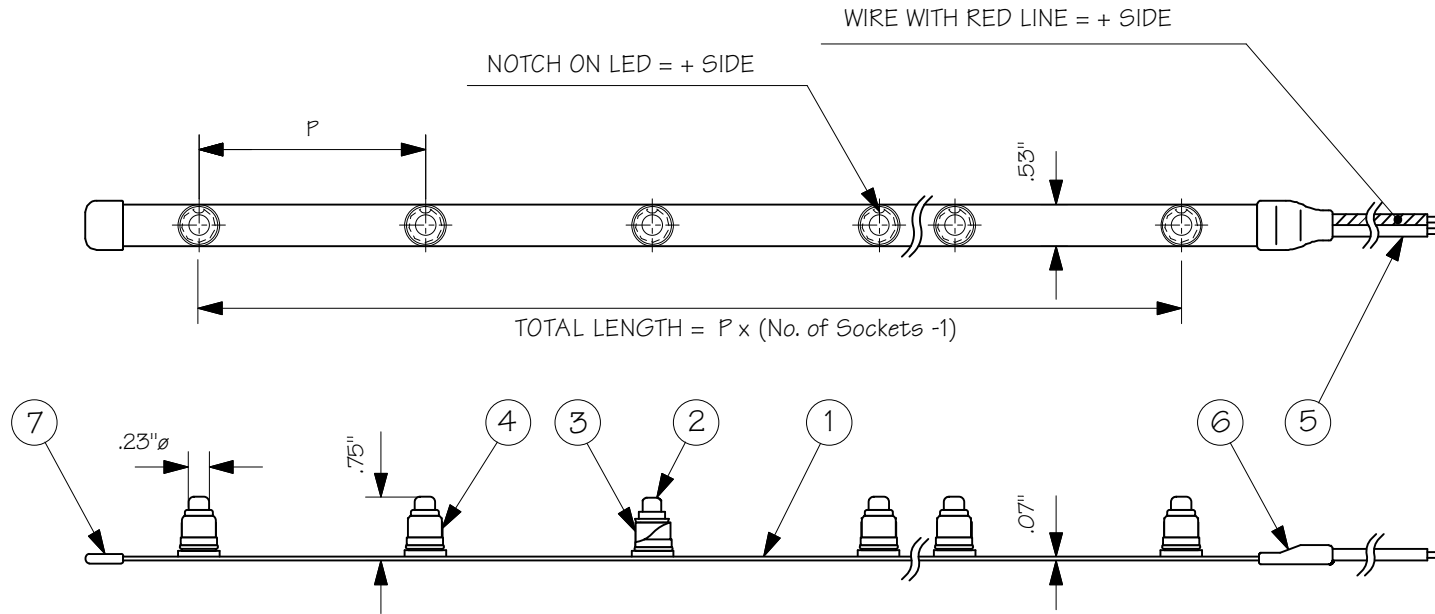

CATALOG#	P (INCH)	MAX. LENGTH
LSW-15-(LED CODE)	0.6 ± .08	10 FT.
LSW-30-(LED CODE)	1.2 ± .08	20 FT.
LSW-50-(LED CODE)	2 ± .08	33 FT.
LSW-80-(LED CODE)	3 ± .12	50 FT.
LS(W,C,B)-100-(LED CODE)	4 ± .16	66 FT.
LS(W,C,B)-150-(LED CODE)	6 ± .20	90 FT.
LS(W,C,B)-300-(LED CODE)	12 ± .40	126 FT.

0.2 WATT KINETIC TOKILEDDS® 8VDC/25.0mA				
PART#	LED CODE	COLOR	EFFECT	LUMEN
KLED-FF	KLED-FF	3000K WHITE	FAST-FLASH/4Hz	1.6Lm
KLED-SF	KLED-SF	3000K WHITE	SLOW-FLASH/0.5Hz	1.6Lm
KLED-CF	KLED-CF	3000K WHITE	CROSS-FADE	1.8Lm

LS CABLE COLOR CODE: W=WHITE, C=CLEAR, B=BROWN
 CLEAR AND BROWN AVAILABLE IN 4", 6" AND 12" SPACING ONLY



TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE
 ANAHEIM, CA 92801
 TEL: 714 772 7005 FAX: 714 772 7014
 email: info@tokistar.com Website: tokistar.com

TAPELIGHT SERIES SUBMITTAL	NO.	PART	MATERIAL
CATALOG#: LS_--(LED CODE)	1	CABLE	PVC INSULATION WITH PLATED COPPER CONDUCTORS
DATE: DECEMBER 20, 2012	2	LED	SOLID-STATE LED
DRAWN BY: R. CORDOVA	3	LAMP SOCKET	POLYCARBONATE WITH PLATED COPPER CONTACTS
SCALE: 1:2	4	CAP	SILICONE (CLEAR)
WEIGHT: 31g/ft.	5	LEAD WIRE	PVC INSULATION WITH PLATED #12 AWG X 2
	6	CORD PROTECTOR	PVC
	7	END CAP	PVC