


# Light Veil / Recessed with Hinge

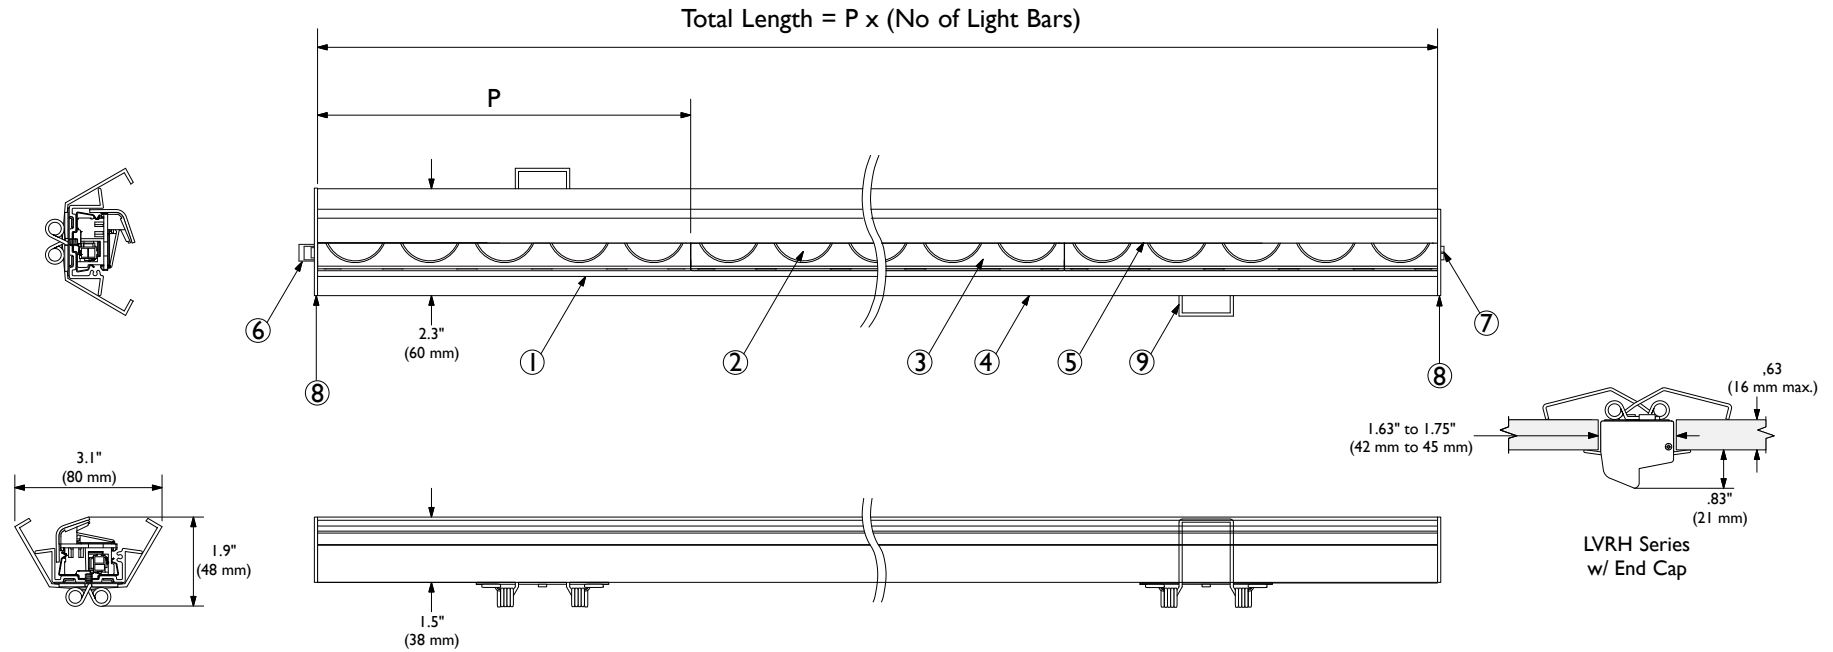

Catalog #	P (Light Bar)	Max. Length
LVRH-(2700, 3000, 4000)-XX	8" / 200 mm	17.75' / 4.8 M (24 Light Bars)

XX = Number of Light Bars

Light Veil Specifications			
Input Voltage 24 VDC			
Current 167mA Per Light Bar			
Power: 4.0 W Per Light Bar			
Code	Color	Output	
2700	2700K	42.5 Lm Per Watt	255 Lm Per Ft.
3000	3000K	44.0 Lm Per Watt	263 Lm Per Ft.
4000	4000K	47.5 Lm Per Watt	285 Lm Per Ft.



## TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE  
ANAHEIM, CA 92801  
TEL: 714 772 7005 FAX: 714 772 7014  
email: info@tokistar.com Website: tokistar.com

Light Veil LVRH Series Submittal	No.	Part	Material
Catalog#: LVRH-(LED Code)-XX	1	Light Bar	Rigid Polycarbonate
Date: January 11, 2018	2	LED	Solid-State LED
Drawn By: R. Cordova	3	Clear Cover	Rigid Polycarbonate
Scale: 1:4	4	Extrusion	Powder Coated Aluminum
Weight: 1 lb. / Ft. (1.5 Kg / M)	5	Baffle	Powder Coated Aluminum
	6	Male Connector	Nylon
	7	Female Connector	Nylon
	8	End Cap	Powder Coated Aluminum
	9	Hinge	Steel