

# 3-COLOUR TEMPERATURE LED Thin-Line Down Light

Designed for remodel and new construction, wet locations listed, Thin-Line Down Lights are a versatile and affordable choice for countless applications.



## FEATURES

- Energy Star rated - up to 80% energy savings
- Dimmable to 5% with most ELV dimmers
- 120° beam spread
- Adjustable colour temperature 2700K/3000K/4000K
- Two spring loaded clips to attach to any ceiling material
- Wet locations listed
- Temperature rating: -20°C-45°C
- No IC can required, for direct contact with insulation and combustible materials
- The driver is wired for 120V input
- 50,000 hour life
- 5 year limited warranty
- Airtight
- cETLus and Energy Star listed
- White finish
- Interchangeable brushed nickel, black and bronze trim rings available (sold separately)

## APPLICATIONS

- Kitchens & Pantries
- Laundry Rooms & Bathrooms
- Lobbies & Hallways
- Banquet Halls
- Elevators
- Retail lighting
- Restaurants
- Offices

## SPECIFICATIONS

	3 inch	4 inch	6 inch
Power Consumption (W)	6W	9W	12W
Lumens			
2700K	360	686	935
3000K	390	728	975
4000K	420	749	978
Dimming	Yes		
Appearance Size D1 x D2 x H	3.15" x 3.74" x 0.5" (80mm x 95mm x 13mm)	4.17" x 4.73" x 0.5" (106mm x 120mm x 13mm)	6.14" x 6.85" x 0.5" (156mm x 174mm x 13mm)
Dimensions (J-Box) D1 x D2 x H	4.72" x 2.05" x 1.83" (120mm x 52.1mm x 46.5mm)	5.1" x 3.5" x 1.3" (129.6mm x 89mm x 33mm)	
Installation Hole Size	3.35" (85mm)	4.33" (110mm)	6.3" (160mm)
Colour Rendering Index	80+		
Input Voltage	120V		
Colour Temperature	2700K 3000K 4000K		
Approved Location	Wet		

NOTE: Each fixture ships with one constant current power supply.

## PRODUCT CODES

**LVLDL - YY - CCT - WH - R - L3**

3 Colour  
Temperature LED  
Thin-Line Down  
Lights

SIZE  
**03** - 3"  
**04** - 4"  
**06** - 6"

ROUND TRIM RINGS  
(Sold Separately)

LVLDL - **03** - TR - **XX** - L3  
LVLDL - **04** - TR - **XX** - L3  
LVLDL - **06** - TR - **XX** - L3

TRIM RING FINISH

**BK** - Black  
**BZ** - Bronze  
**BN** - Brushed Nickel

BEAUTY RINGS  
(Sold Separately)

LVLDL - BR - **3** - L3  
LVLDL - BR - **4** - L3  
LVLDL - BR - **6** - L3

† White finish only.

STEP-DOWN TRANSFORMERS

**DLT-347**




Step-down transformer 347/120V AC  
25VA (non-dimmable)

**DLT-60-347**

Step-down transformer 347/120V AC  
60VA (non-dimmable)

**DLT-100-347**



Step-down transformer 347/120V AC  
100VA (non-dimmable)

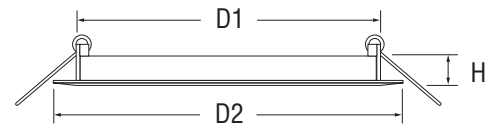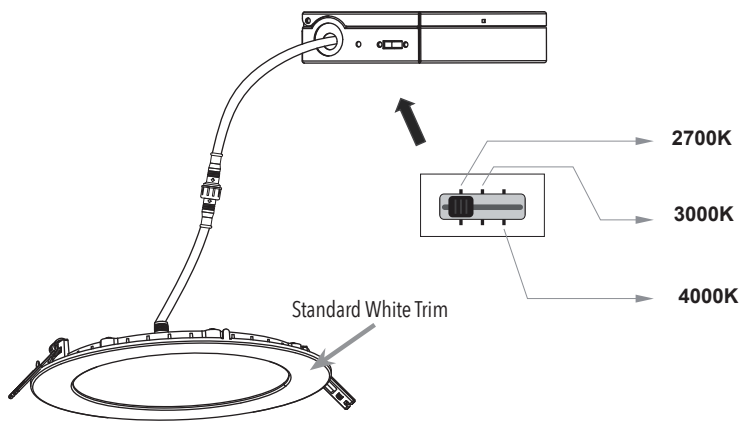

Interchangeable brushed nickel, black and bronze trim rings available (sold separately).

## CONSTRUCTION PLATES

## BEAUTY RINGS

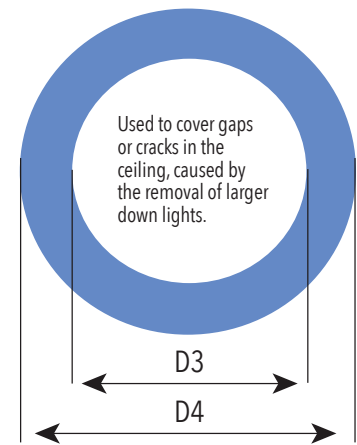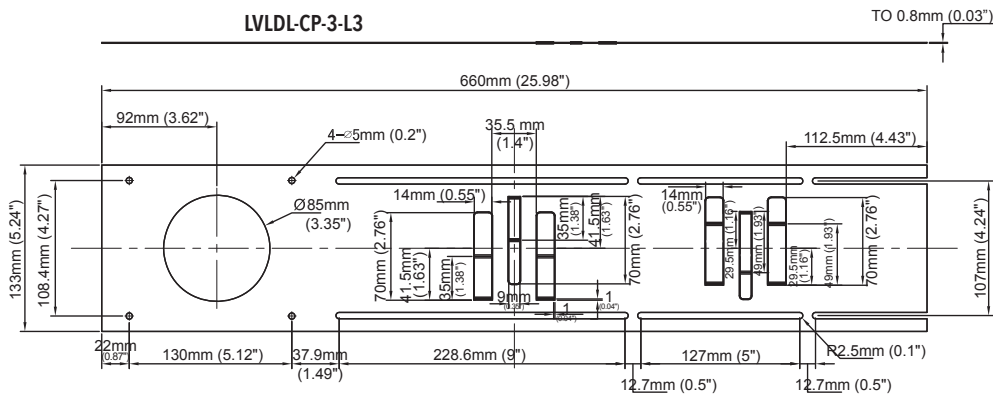

Size	D3	D4
3"	84mm (3.31")	114mm (4.49")
4"	109mm (4.29")	139mm (5.47")
6"	160mm (6.3")	194mm (7.64")
8"	210mm (8.27")	245mm (9.65")
10"	261mm (10.28")	293mm (11.54")

