

LED Neon Flex is a functional, flexible option to highlight architectural and design elements while adding colour and vibrancy to building exteriors.



Features

- Virtually maintenance free
- Low power consumption
- Flexible LED strip lighting with neon look
- Safe 24V DC operation
- cETLus certified
- Dimmable
- Inter-connectable
- Field cuttable (every 4" single color, every 12" RGB)
- Custom cuts available
- Available in seven brilliant colours, and RGB
- Highly flexible
- Indoor/outdoor use
- 30,000 hour life
- 3 year limited warranty

Specifications

Colour Temperature	WW = 3000K +/- 200K; 3500K +/-200K NW = 4000K +/- 200K CW = 6000K +/- 200K RD = Red GR = Green BL = Blue AM = Amber RGB
Electrical	24V DC, 2.44 W/FT (8W/M)
Lumen Output	61 LM/FT (200LM/M)
Efficacy	25 LPW
Custom Cuttable	4" single colour, 12" RGB
Operating Temperature	-20°C - 40°C
Maximum length	40FT (12.2M)
CRI	>80
LED Life	30,000 hours
IP Rating	IP65
Beam angle	120°
Dimmable	Yes
Approvals	cETLus



Ordering Code:

NFLX- Length - Colour
XX = length in feet

WW = Warm White
 NW = Neutral White
 CW = Cool White, RD = Red
 GR = Green
 BL = Blue, AM = Amber
 RGB = Colour changing

Project		Type	
Date		Contact	
Notes			

LED Neon Flex is a functional, flexible option to highlight architectural and design elements while adding colour and vibrancy to building exteriors.

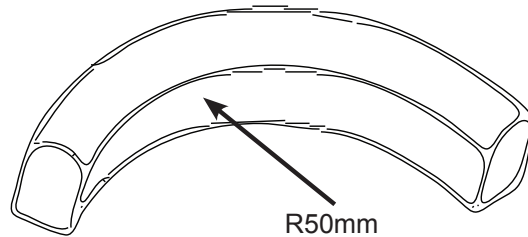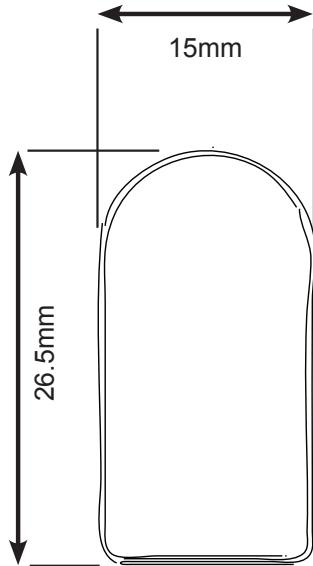


SINGLE COLOR ACCESSORIES

NFLX-CONKIT-6FT (Power feed connector, 6FT) **NFLX-JUMP** (Jumper connector, 15CM [6in]) **NFLX-PINS** (Single color pins)



NFLX-SPLICE (In-line splice connector) **NFLX-L-SPLICE** (L splice connector) **NFLX-T-SPLICE** (T splice connector)

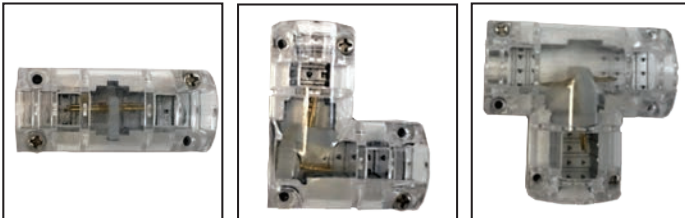

NFLX-ENDS (End cap) **NFLX-CLIPS** (Mounting clips) **NFLX-CHANNEL** (Aluminum mounting channel 1M [3.28FT])




RGB ACCESSORIES

NFLX-RGB-CONTROL (RGB controller) **NFLX-RGB-AMP** (RGB signal amplifier) **NFLX-RGB-CONKIT-6FT** (RGB power feed connector, 6FT)



NFLX-RGB-CONKIT-6FT-O (RGB power feed connector, 6FT, opposite) **NFLX-RGB-JUMP** (RGB Jumper connector 15cm [6in]) **NFLX-RGB-PINS** (RGB pins)

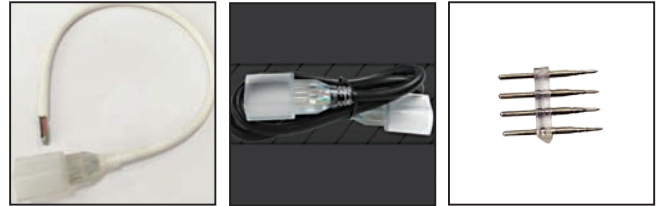

NFLX-ENDS (End cap) **NFLX-CLIPS** (Mounting clips) **NFLX-CHANNEL** (Aluminum mounting channel 1M [3.28FT])

