

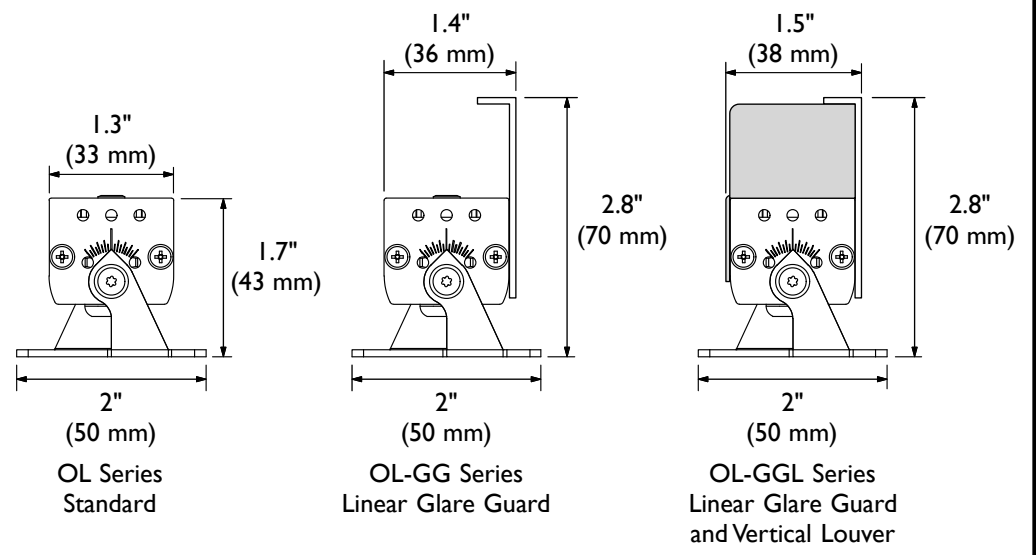



# O'Links Series - I LED Fixture Submittal

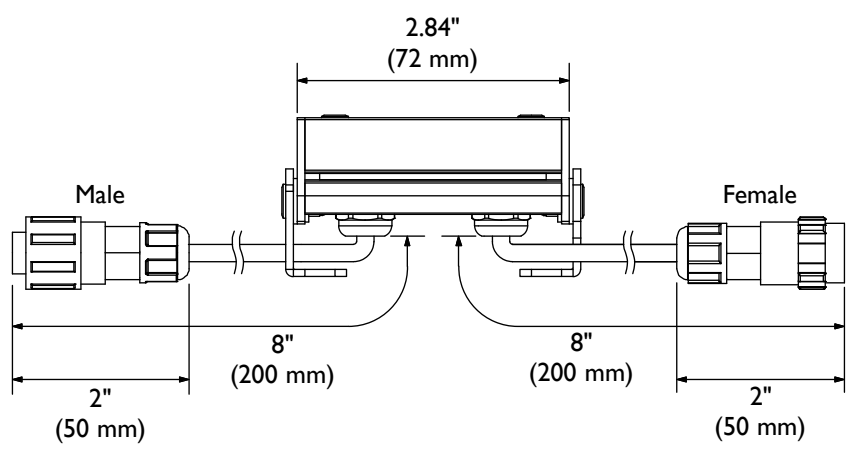

| Catalog#                        | Watts Per Fixture | Max. Length         |
|---------------------------------|-------------------|---------------------|
| OL-(2700, 3000, 4000)-I5D-I     | 2.1               | 18 Fixtures (37.8W) |
| OL-GG-(2700, 3000, 4000)-I5D-I  | 2.1               | 18 Fixtures (37.8W) |
| OL-GGL-(2700, 3000, 4000)-I5D-I | 2.1               | 18 Fixtures (37.8W) |

| O'Links Series Specifications |                |
|-------------------------------|----------------|
| Current: 700mA                |                |
| Power: 2.1 W Per LED          |                |
| IP Rating: 66                 |                |
| CRI Value: 85                 |                |
| Color                         | Output         |
| 2700K                         | 150 Lm Per LED |
| 3000K                         | 160 Lm Per LED |
| 4000K                         | 180 Lm Per LED |

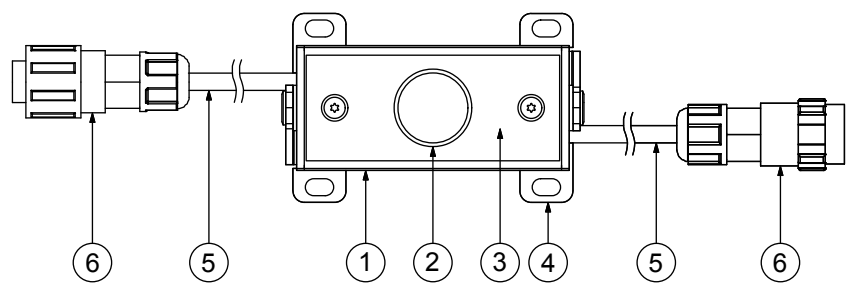

**TOKISTAR LIGHTING INC.**  
 1015 E. DISCOVERY LANE  
 ANAHEIM, CA 92801  
 TEL: 714 772 7005 FAX: 714 772 7014  
 email: info@tokistar.com Website: tokistar.com

| O'Links Series Submittal                        | No. | Part                        | Material                              |
|---|-----|-----------------------------|---------------------------------------|
| Catalog#: OL-(GG, GGL)-(2700, 3000, 4000)-I5D-I | 1   | Extrusion                   | Anodized Aluminum                     |
| Date: December 1, 2018                          | 2   | LED                         | Solid State LED                       |
| Drawn By: R. Cordova                            | 3   | Cover                       | Anodized Aluminum                     |
| Scale: 1:2                                      | 4   | Adjustable Mounting Bracket | Stainless Steel                       |
| Weight: 170g per fixture                        | 5   | Power Cable                 | PVC Insulation (#18 AWG x 2)          |
|   | 6   | Connectors                  | Nylon (weather-resistant) IP67 rating |