


# TLXWG-CHV-AB / Wall Grazer w/Channel, Louvers & Adjustable Bracket

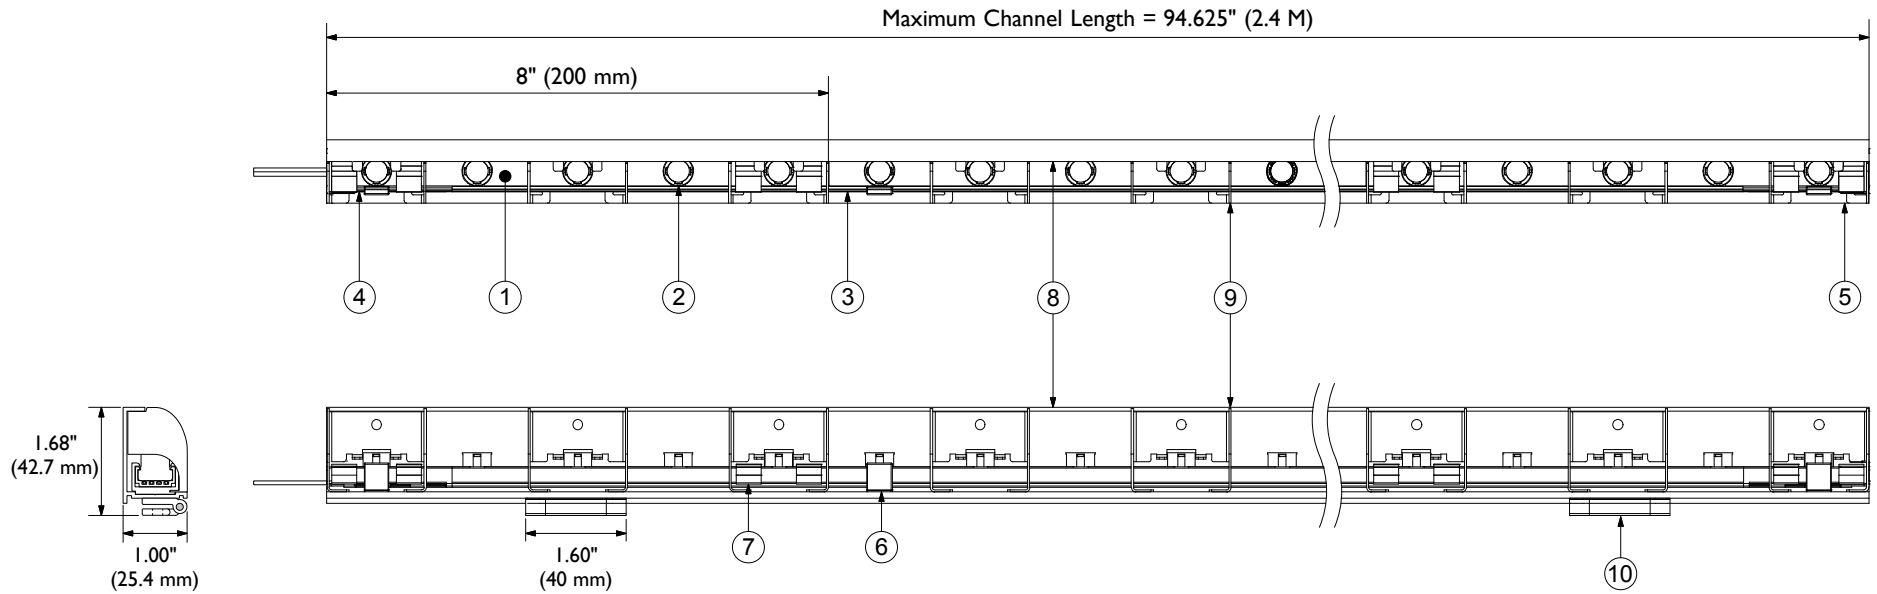

Catalog #	Light Bar	Max. Length
TLXWG-CHV-(2400, 2700, 3000)-AB	8 In. (200 mm)	94.625"/2.4 M (12 Light Bars)

AB = Adjustable Bracket

TokiLux Wall Grazer Specifications			
Input Voltage: 24 VDC			
Current: 167mA Per Light Bar			
Power: 4.0W Per Light Bar			
LED Code	Color	Output	
2400	2400K	47.5 Lm Per Watt	285 Lm Per Ft.
2700	2700K	47.5 Lm Per Watt	285 Lm Per Ft.
3000	3000K	50.0 Lm Per Watt	300 Lm Per Ft.
Beam Spread: 18° X 48°			



## TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE  
ANAHEIM, CA 92801  
TEL: 714 772 7005 FAX: 714 772 7014  
email: info@tokistar.com Website: tokistar.com

TokiLux WG w/Channel, Louver & Adjustable Bracket Submittal	No.	Part	Material
Catalog#: TLXWG-CHV-(2400, 2700, 3000)-AB	1	Light Bar	Rigid Polycarbonate
Date: July 1, 2020	2	LED	Solid-State LED
Drawn By: R. Cordova	3	Rail	Rigid Polycarbonate
Scale: 1:3	4	Feed End	Rigid Polycarbonate
Weight: 230g/0.51 lb per ft.	5	End Cap	Rigid Polycarbonate
	6	Mounting Clamp	Polycarbonate
	7	Retainer Clip	Stainless Steel
	8	Extrusion / Glare Guard	Aluminum
	9	Louver	Aluminum
	10	Adjustable Bracket	POM