



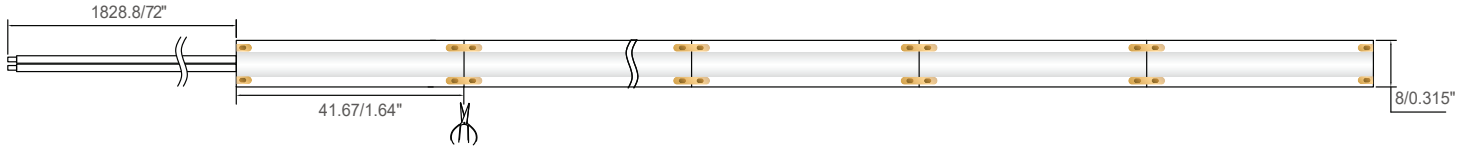

■ STREAMLINE TAPE SERIES

# Tunable CCT Indoor, High Power & Low Power



## ACCESSORIES

6' Powerfeed	6" Jumper	Splice	L-shaped Connector	T-shaped Connector
SL-ID-W2BC-72	SL-ID-BWBC-6	SL-ID-B2BC	SL-ID-LC	SL-ID-TC

## CONTROLLERS

<b>2 Wire CCT Controller</b>	CNTRL-2W-CCT
<b>Rotating CCT Scene Remote White / Black</b>	<ul style="list-style-type: none"> <li>• CNTRL-4Z-CCT-RWP-WH</li> <li>• CNTRL-4Z-CCT-RWP-BK</li> </ul>
<b>4 Zone CCT Remote</b>	CNTRL-4Z-CCT-RM

## DRIVERS

Non-Dimmable	
<b>Plug-in Driver 48W/96W</b>	<ul style="list-style-type: none"> <li>• PGID2448</li> <li>• PGID2496</li> </ul>
<b>Indoor/Outdoor driver</b>	LEDDR-24-120W

## Specifications

Input Voltage	24V DC	Binning	1BIN
Power Consumption	<ul style="list-style-type: none"> <li>• 2.74 W/ft (9W/m)</li> <li>• 1.22 W/ft (4W/m)</li> </ul>	SDCM	<3
Efficacy	110 Lm/w	Lifespan	50,000 Hours
Color Temperature	2700K-6500K	Dimensions (Inches)	.31" W
Lumen Output	<ul style="list-style-type: none"> <li>• 301Lm/ft (990Lm/m)</li> <li>• 134Lm/ft (440Lm/m)</li> </ul>	Dimensions (Millimeters)	8mm W
Beam Angle	140°	Max Length	20Ft (6M)
Dimmable	Yes (PWM / 0-10V / 1-10V)	Custom Cuttable	1.64" (41.67mm)
Chip Type	2219	IP Rating	IP40
CRI	90	Approved Location	Indoor
# per meter	384	Warranty	5 Years

## Ordering Code(s)

- SL-ID-CCT-HP-XX-A8 [XX: Length in feet; A: 2219 LED; 8: 8mm PCB]  
Available in 20 or 100 feet; For 20 feet: SL-ID-CCT-HP-20-A8; For 100 feet: SL-ID-CCT-HP-100-A8
- SL-ID-CCT-LP-XX-A8 [XX: Length in feet; A: 2219 LED; 8: 8mm PCB]  
Available in 20 or 100 feet; For 20 feet: SL-ID-CCT-LP-20-A8; For 100 feet: SL-ID-CCT-LP-100-A8

Project		Type	
Date		Contact	
Notes			