
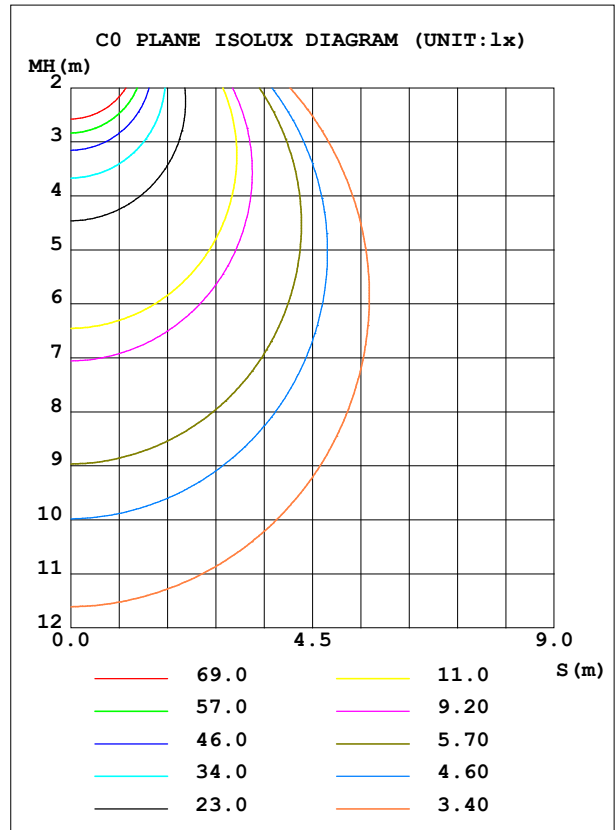


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:119.99V I:0.0924A P:10.877W PF:0.9805 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1265.81x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	RGL-FR-5CCT-4-WH	Imax (cd)	458.6	S/MH (C0/180)	1.26
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1265.8	$\eta$ UP, DN (C0-180)	0.0, 50.1
NOMINAL FLUX (lm)	1265.81	CIE CLASS	DIRECT	$\eta$ UP, DN (C180-360)	0.0, 49.9
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	$\eta$ down (%)	100.0	CIBSE SHR MAX	1.35

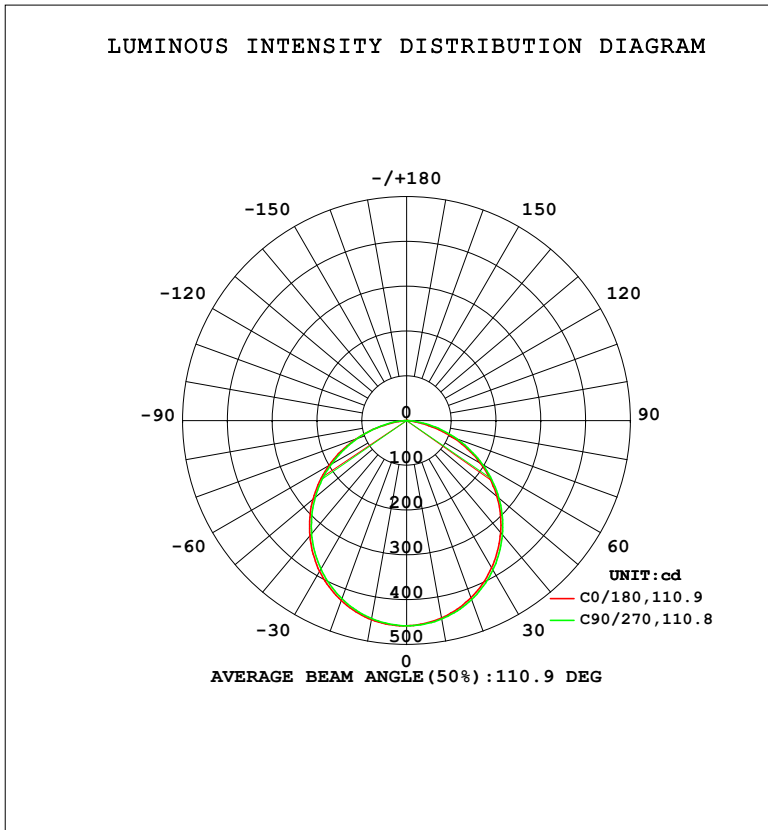

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.3 °C  
 Operators:  
 Test Date: 2024-12-11

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity: 65.0%  
 Test Distance: 3.087m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	447.6	448.7	449.9	450.8	451.4	450.2	448.7	448.3	0- 10	43.32	43.32	3.42,3.42
20	420.9	422.5	425.2	427.1	427.5	425.5	423.2	421.5	10- 20	123.8	167.1	13.2,13.2
30	379.7	381.6	385.7	387.8	388.7	386.0	382.8	380.9	20- 30	187.0	354.2	28,28
40	326.9	329.2	332.7	335.2	336.4	333.4	330.2	328.1	30- 40	224.7	578.9	45.7,45.7
50	263.4	265.6	269.1	272.0	273.0	269.9	266.4	264.5	40- 50	232.1	811.0	64.1,64.1
60	190.5	192.6	196.1	198.9	200.4	197.0	193.7	192.1	50- 60	207.6	1019	80.5,80.5
70	108.7	113.8	118.7	121.0	119.4	119.1	116.6	113.7	60- 70	154.5	1173	92.7,92.7
80	27.32	34.52	44.87	40.78	35.00	38.60	43.06	34.55	70- 80	80.73	1254	99.1,99.1
90	0.4386	0.4754	0.6552	0.4836	0.2830	0.2819	0.3896	0.2923	80- 90	11.93	1266	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.3 °C  
 Operators:  
 Test Date:2024-12-11

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.087m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.99V I:0.0924A P:10.877W PF:0.9805 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1265.81x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

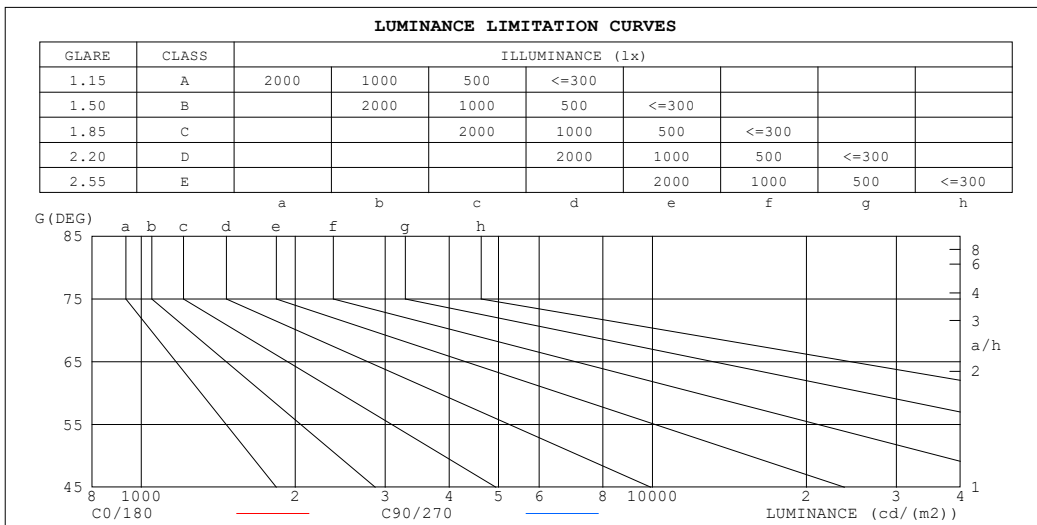

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	89337	440526
80	501022	822901
75	832442	997026
70	1011877	1105638
65	1134122	1187017
60	1213278	1248837
55	1263805	1295599
50	1304870	1333495
45	1335879	1360666


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.3°C  
 Operators:  
 Test Date: 2024-12-11

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity: 65.0%  
 Test Distance: 3.087m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.99V I:0.0924A P:10.877W PF:0.9805 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1265.81x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.05	1.00	.97	1.02	.99	.95	.98	.95	.92	.94	.92	.89	.91	.89	.87	.85
2.0	.91	.85	.79	.89	.83	.78	.86	.81	.76	.83	.78	.74	.80	.76	.73	.71
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.67	.63	.70	.66	.62	.60
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.55	.65	.59	.54	.63	.57	.53	.51
5.0	.63	.55	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.41	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.34
8.0	.47	.39	.33	.47	.38	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.42	.34	.29	.41	.34	.29	.40	.34	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.25

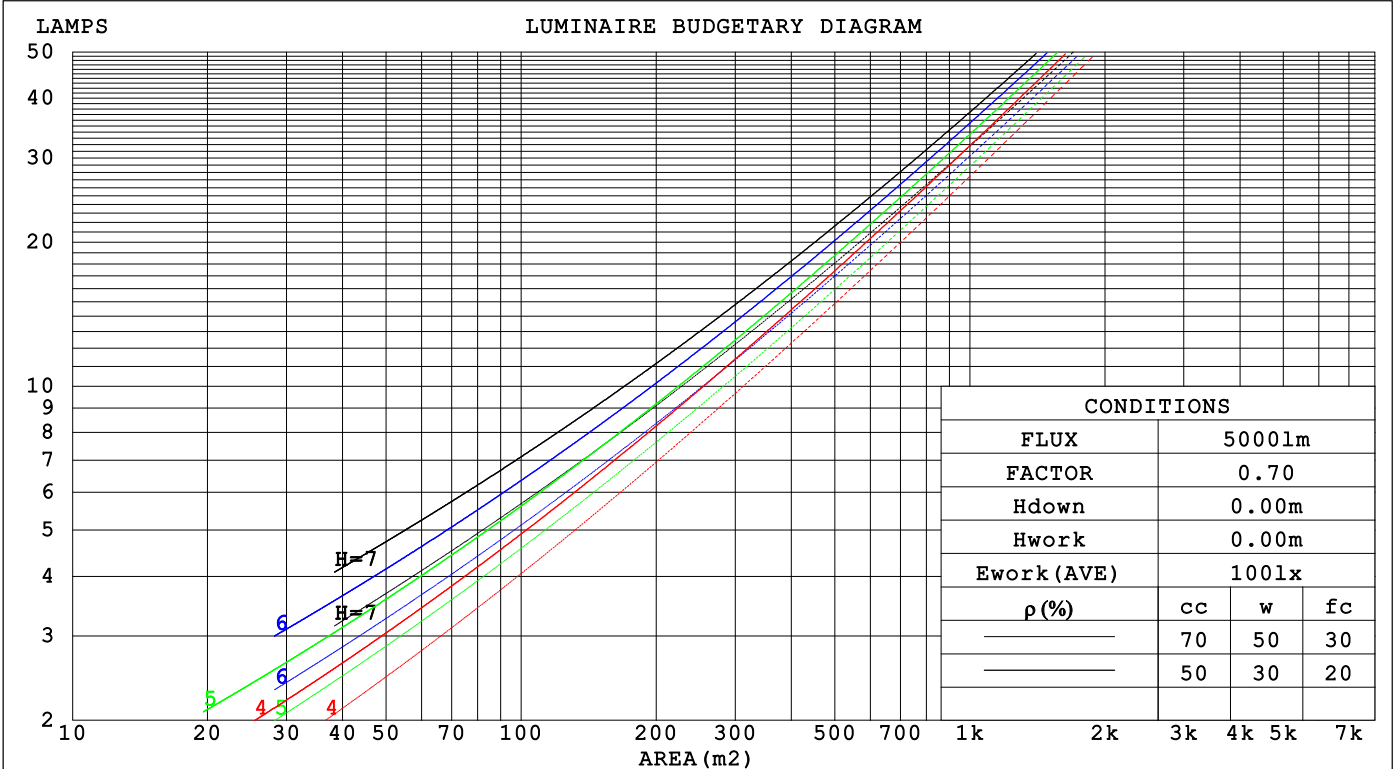

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.3°C  
 Operators:  
 Test Date:2024-12-11

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.087m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.99V I:0.0924A P:10.877W PF:0.9805 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1265.81x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.296	.169	.053	.289	.165	.052	.276	.158	.051	.264	.152	.049	.253	.147	.047	
2.0	.284	.155	.048	.278	.153	.047	.266	.148	.046	.255	.143	.045	.245	.139	.044	
3.0	.265	.141	.042	.259	.139	.042	.249	.135	.041	.239	.131	.040	.231	.128	.039	
4.0	.245	.127	.037	.240	.126	.037	.231	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.227	.116	.034	.223	.115	.033	.215	.112	.033	.208	.110	.033	.201	.107	.032	
6.0	.211	.106	.030	.208	.105	.030	.200	.103	.030	.194	.101	.030	.187	.099	.029	
7.0	.197	.097	.028	.194	.096	.027	.187	.095	.027	.181	.093	.027	.176	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.175	.088	.025	.170	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.170	.083	.023	.165	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.163	.078	.022	.160	.077	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021	

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.179	.156	.135	.153	.134	.117	.105	.092	.081	.060	.053	.047	.019	.017	.015	
2.0	.171	.132	.099	.147	.114	.086	.100	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.163	.114	.075	.140	.099	.065	.096	.068	.046	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.090	.048	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.111	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.3°C  
 Operators:  
 Test Date:2024-12-11

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.087m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.99V I:0.0924A P:10.877W PF:0.9805 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1265.81x1 lm										
NAME: RGL-FR-5CCT-4-WH					TYPE:			WEIGHT:		
SPEC.: 4000K					DIM.:			SERIAL No.:		
MFR.: MAGICLITE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	37.7	39.2	38.0	39.4	39.6	37.8	39.3	38.1	39.5	39.7
3H	39.0	40.4	39.3	40.7	40.9	39.3	40.6	39.5	40.9	41.1
4H	39.5	40.8	39.8	41.0	41.3	39.8	41.1	40.1	41.4	41.6
6H	39.6	40.9	40.0	41.1	41.4	40.1	41.4	40.5	41.6	41.9
8H	39.6	40.8	39.9	41.1	41.4	40.2	41.4	40.5	41.7	42.0
12H	39.6	40.7	39.9	41.0	41.3	40.2	41.4	40.6	41.7	42.0
4H 2H	38.3	39.6	38.6	39.8	40.1	38.4	39.7	38.7	39.9	40.2
3H	39.8	40.9	40.1	41.2	41.5	40.0	41.1	40.3	41.4	41.7
4H	40.3	41.4	40.7	41.7	42.0	40.6	41.7	41.0	42.0	42.3
6H	40.6	41.5	41.0	41.8	42.2	41.1	42.0	41.5	42.4	42.7
8H	40.6	41.4	41.0	41.8	42.2	41.2	42.1	41.6	42.4	42.8
12H	40.5	41.3	40.9	41.7	42.1	41.2	42.0	41.6	42.4	42.8
8H 4H	40.5	41.4	40.9	41.8	42.1	40.8	41.7	41.2	42.1	42.4
6H	40.8	41.6	41.3	42.0	42.4	41.4	42.1	41.8	42.5	42.9
8H	40.9	41.5	41.3	41.9	42.4	41.5	42.1	42.0	42.6	43.0
12H	40.8	41.4	41.3	41.8	42.3	41.6	42.1	42.0	42.6	43.0
12H 4H	40.5	41.3	40.9	41.7	42.1	40.8	41.6	41.2	42.0	42.4
6H	40.9	41.5	41.3	41.9	42.4	41.4	42.0	41.8	42.4	42.9
8H	40.9	41.4	41.4	41.9	42.3	41.5	42.1	42.0	42.5	43.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1266 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.8)  
 Area: 0.000314 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.3°C  
 Operators:  
 Test Date:2024-12-11

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.087m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.99V I:0.0924A P:10.877W PF:0.9805 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1265.81x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	47	40	57	46	40	56	46	39	33
0.80	68	57	49	67	56	49	65	56	49	42
1.00	77	66	59	76	65	58	73	67	58	51
1.25	84	74	67	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	77	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	100	92	86	98	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	100	95	100	96	93	84
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.3°C  
 Operators:  
 Test Date:2024-12-11

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.087m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.99V I:0.0924A P:10.877W PF:0.9805 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1265.81x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

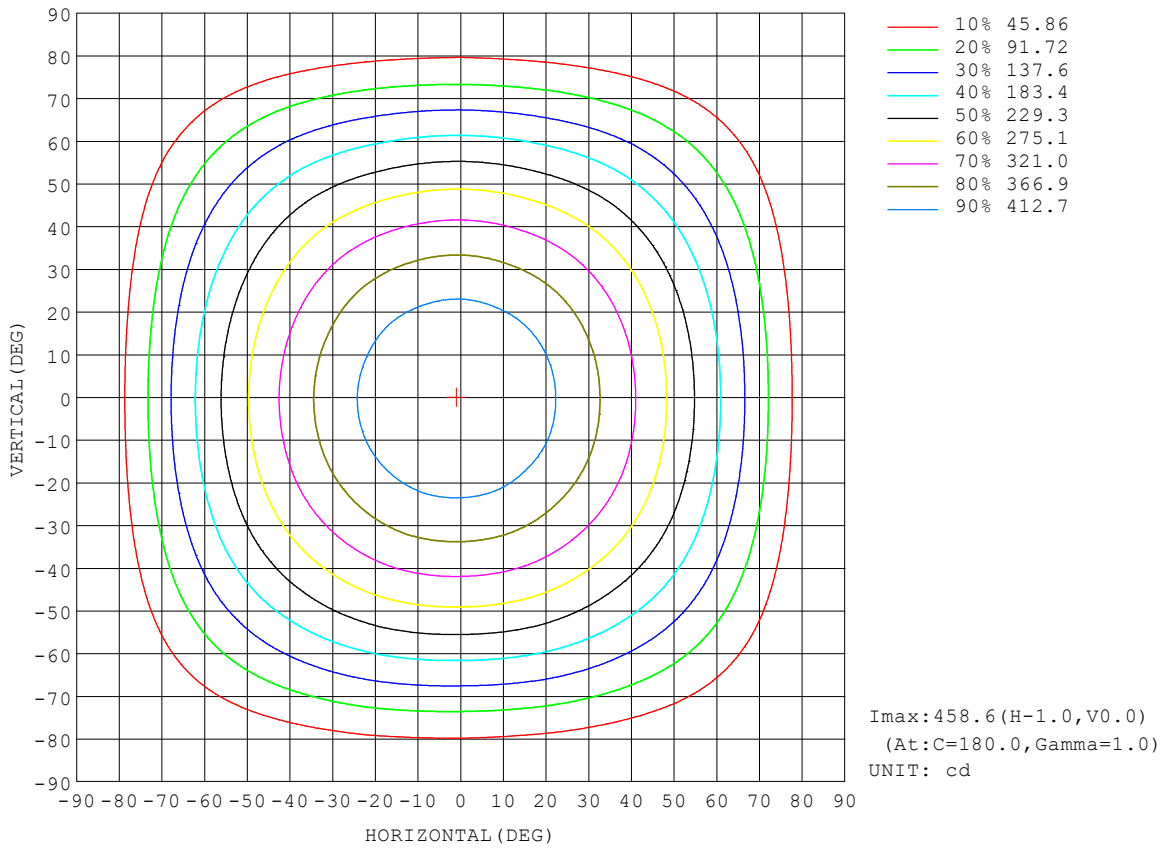


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.3°C  
 Operators:  
 Test Date:2024-12-11

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.087m [K=1.0000]  
 Remarks:

**AAI CURVES**

Test:U:119.99V I:0.0924A P:10.877W PF:0.9805 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1265.81x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

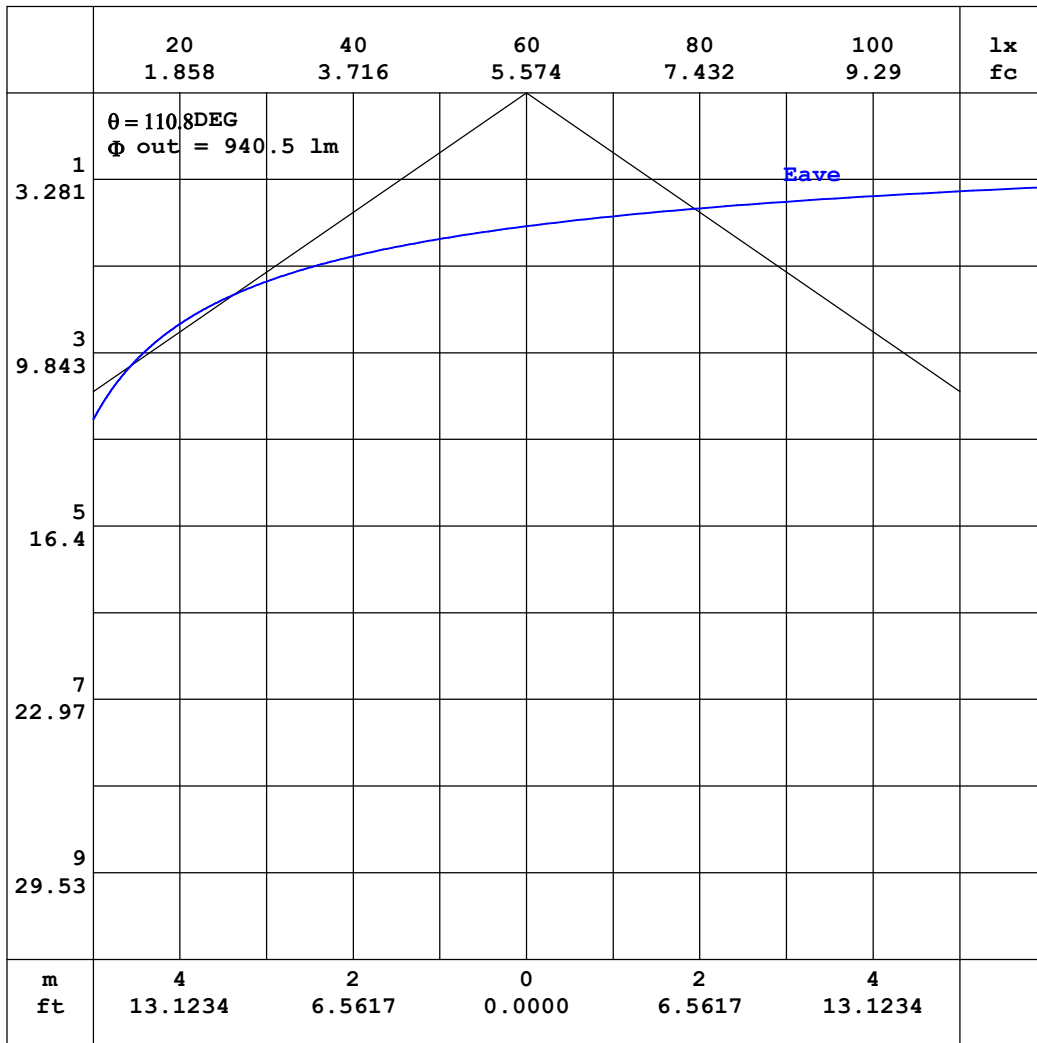


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.3°C  
 Operators:  
 Test Date: 2024-12-11

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity: 65.0%  
 Test Distance: 3.087m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.99V I:0.0924A P:10.877W PF:0.9805 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1265.81x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

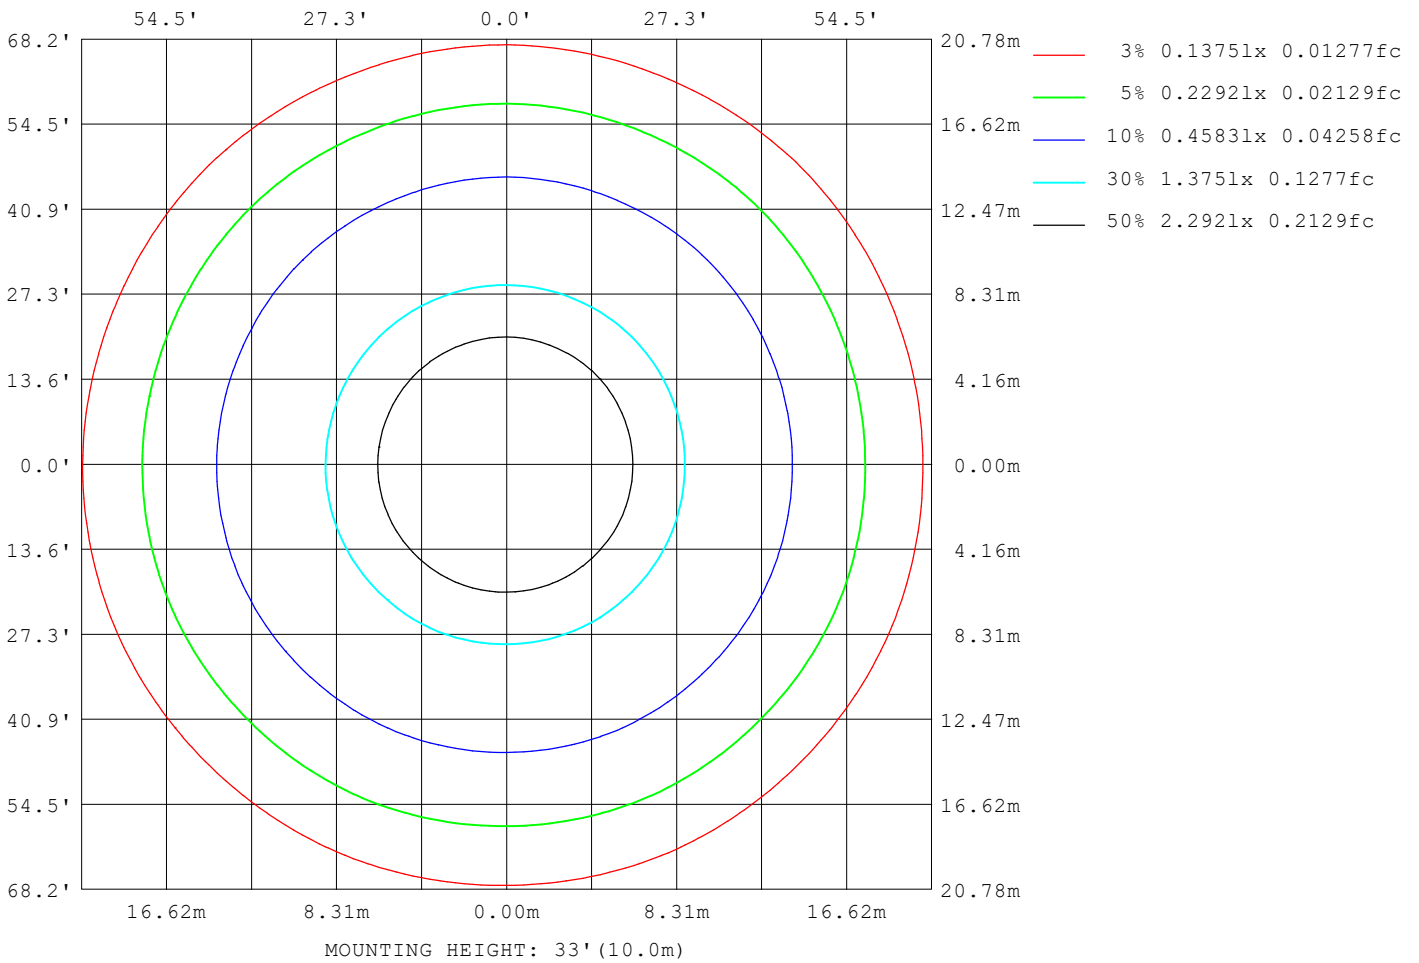

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.3°C  
 Operators:  
 Test Date: 2024-12-11

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity: 65.0%  
 Test Distance: 3.087m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.99V I:0.0924A P:10.877W PF:0.9805 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1265.81x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1174874
L_0~180 (75) av	889507
L_0~180 (85) av	103054
L_90~270 (65) av	1178387
L_90~270 (75) av	983051
L_90~270 (85) av	415561
L_45 (65) av	1180582
L_45 (75) av	943825
L_45 (85) av	162600

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.3℃  
 Operators:  
 Test Date:2024-12-11

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.087m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

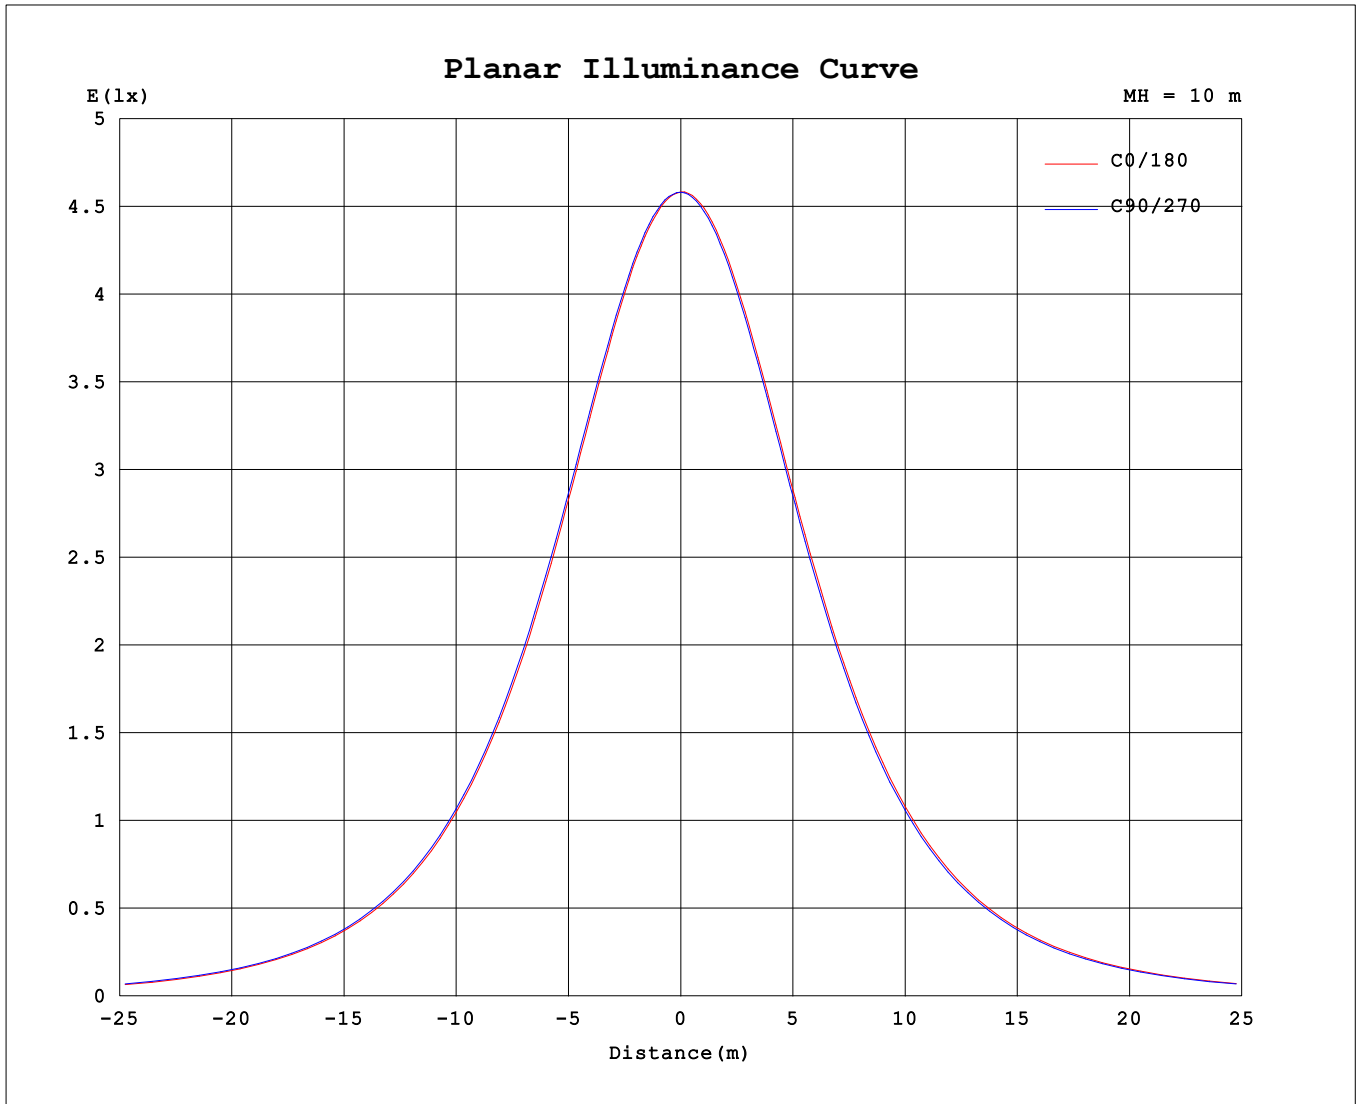

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.3 °C  
 Operators:  
 Test Date: 2024-12-11

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity: 65.0%  
 Test Distance: 3.087m [K=1.0000]  
 Remarks:

